



ThaiHang

Advanced and economic tape of china

ANTI-SPLASHING TAPES

Accordance with regulation ii-2 /4. 2.2.5.3 of SOLAS



ABS

DNV


ClassNK

RI

LR

ANTI-SPLASHING TAPES

Anti-splash tapes were designed with the aim to prevent pipeline installations from oil sprays in accordance with the latest SOLAS Consolidate Edition 2004 Regulation II-2/4.2.2.5.3. Specially constructed to withstand high temperatures and high pressure, they serve as a protection against an uncontrolled spraying of flammable liquids onto hot surfaces, which might be a cause of fire or explosion.

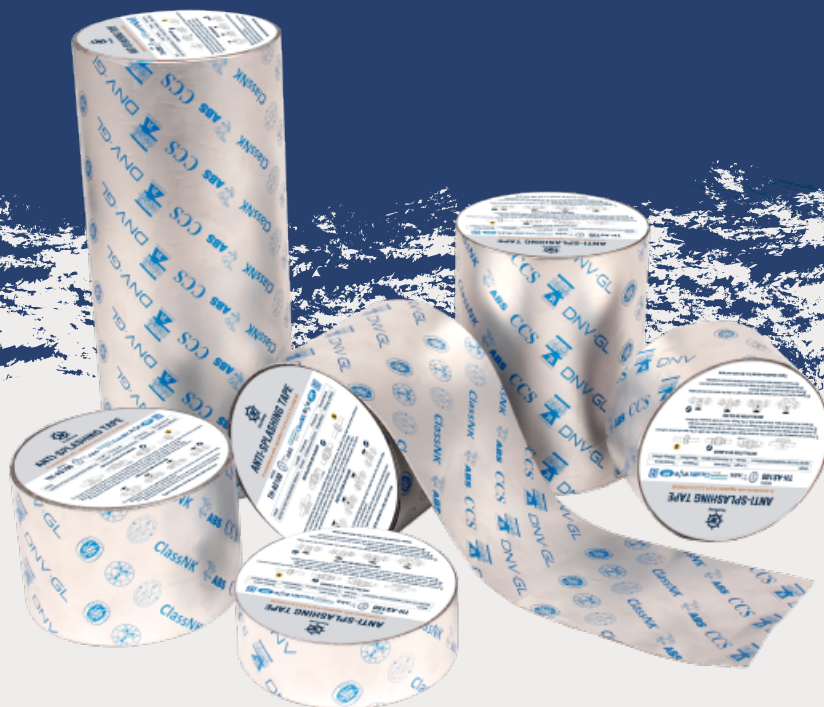

SPECIFICATION

Model	TH-AS100
Length	10mtrs
Width	35mm/50mm/75mm 100mm/140mm/250mm 500mm/1000mm
Thickness	0.0355mm
Pressure	1.6Mpa(Max)
Temperature	160 deg.c(Max)

Applied to hot water or steam pipes, pipe joints, flanges boilers and engine installations



TAPE MATERIAL

2 layer Aluminum foil 3 layer Special Adhesive
1 layer Aramid woven cloth 1 layer Separator

