


NOISE REDUCTION. ALL DAY COMFORT.



ATTENUATION DATA							
Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound Attenuation [dB]	34.5	30.4	36.0	31.9	36.1	41.2	43.0
Standard Deviation [dB]	5.8	4.4	4.7	4.6	4.8	5.6	4.1
Assumed Protection (APV) [dB]	28.8	26.0	31.3	27.3	31.2	35.6	38.9

*SNR = 32dB H = 32dB M = 29dB L = 28dB

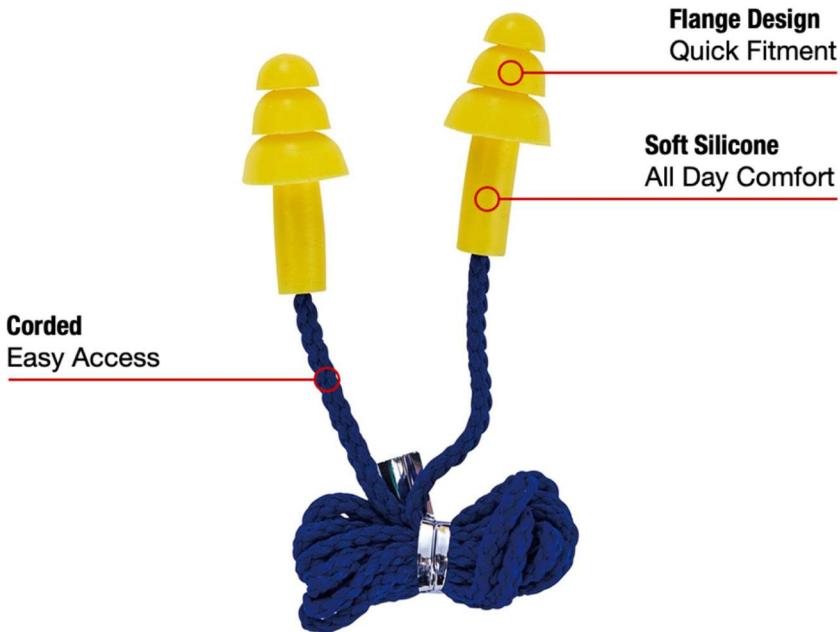

SPECIFICATIONS	
Material	Silicone
Design	Triple Flange
Texture	Smooth and Soft
Single Number Rating (SNR)	28dB
Colour	Yellow

RECOMMENDED APPLICATIONS
<ul style="list-style-type: none"> Light and Precision Engineering Assembly and Maintenance Grinding and Angle Grinding Offshoring/Maritime Oil and Gas Plant Visitors

CARE INSTRUCTIONS
<p>Inspect- Prior to fitting, discard if earplug is dirty, damaged, hard or stiff.</p> <p>Clean- Wash reusable earplugs with mild soap and warm water only. Dry thoroughly and store in a case when not in use. Use of cleaners other than mild soap and water may damage the material, making it ineffective.</p> <p>Hygiene- With proper maintenance, reusable earplugs should be replaced every 2-4 weeks. Push-in foam earplugs should be replaced every 5 days.</p>

PACKING DETAILS	
Selling Unit	1 Pair
Inner Pack	100 Pairs
Outer Carton	2000 Pairs
Carton Size	52CM x 42.5CM x 40.5CM
Volume	0.0895CBM
Gross Weight	10KG

EVO FULL RANGE